



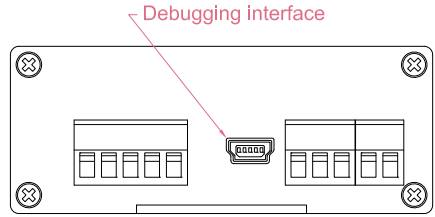

Dimensions in "mm"

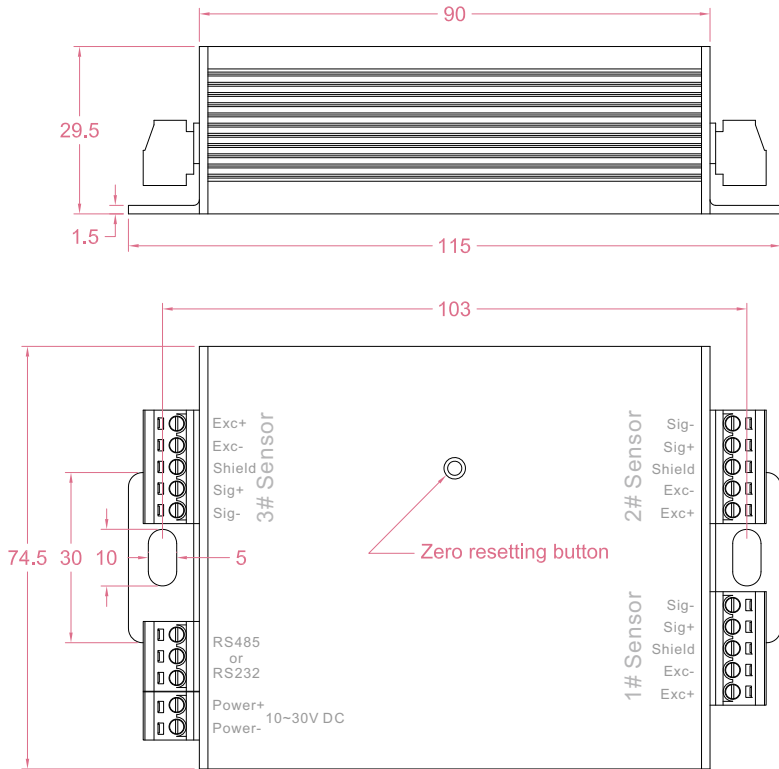

Ordering code	Explanation
DA03-485	RS485 interface
DA03-232	RS232 interface
DA-M	To debug DA03 Refer to P:2/2


Power Supply	10~30V DC
ADC	24-bit Delta-Sigma
A/D Conversion Rate	10/40/640/1280Hz
Accuracy	±0.01% F.S.
Excitation For Load Cell	5V DC
Applicable Rated output	0.5~5.0 mV/V
Display Range	-9999...99999
Working Temperature	-10...+60°C
IP Rating	IP30
Housing	Aluminum
Communication Interface	RS485 or RS232
Communication Protocol	Modbus-RTU,ASCII




Dimensions in "mm"

Part No.: DA-M

1 meter long data cable included

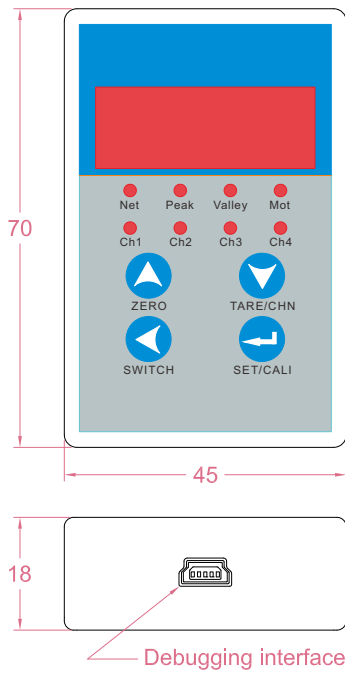

### Wiring Diagram

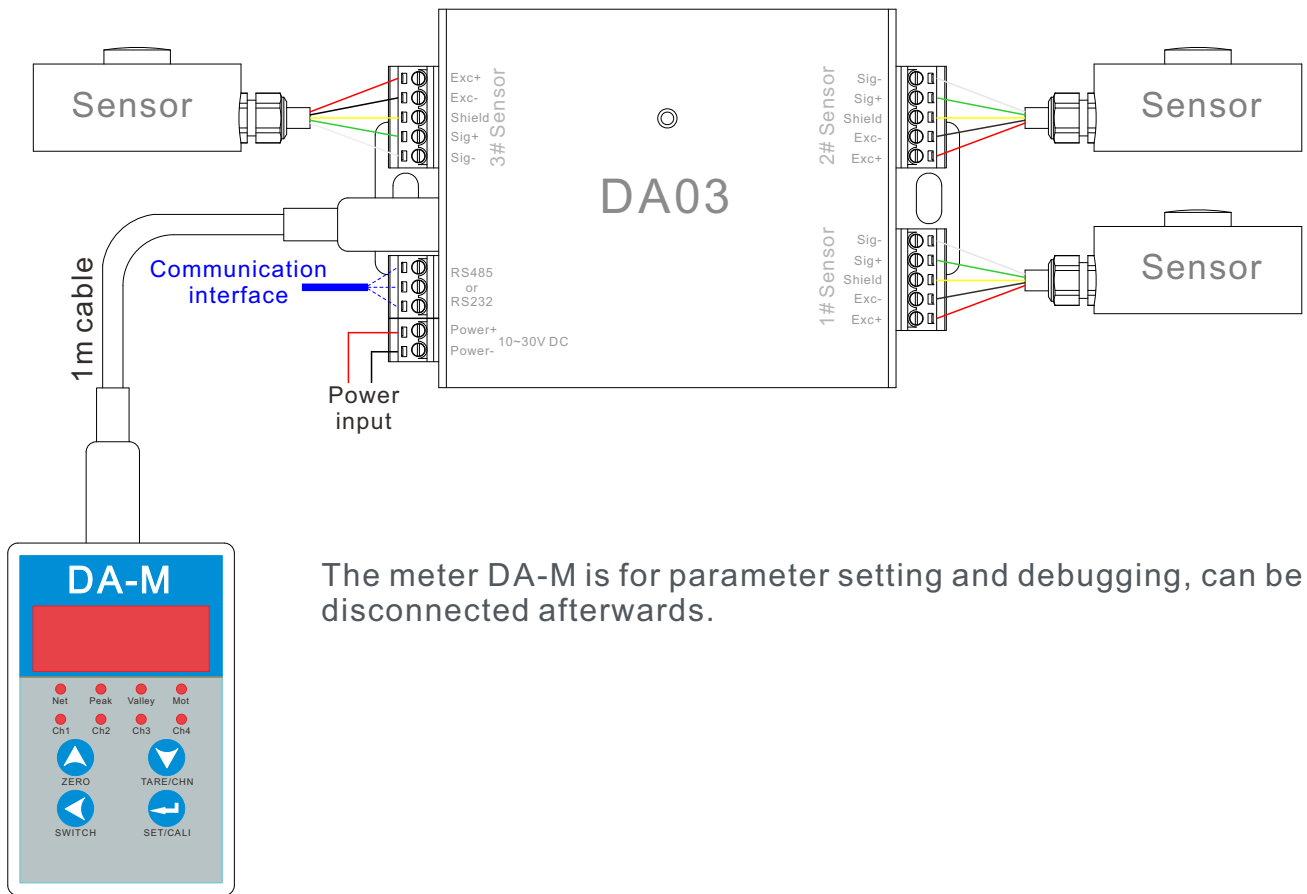

The meter DA-M is for parameter setting and debugging, can be disconnected afterwards.

Email to [sales@loadcellsensor.com](mailto:sales@loadcellsensor.com) for user manual

P:2/2